

AP-750EN

50W Outdoor Music Horn




EN54-24

- Outdoor horn loudspeaker with 100V/70V transformer
- Compliant with the EN54-24 standards
- Ideal for outdoor BGM and speech use in school, park and airport
- Superior sound quality and long distance transmission
- Multiple power taps of 12.5W-25W-50W & 8Ω
- IP66 waterproof level with AB cable glands
- Line input 100V and 70V
- Ceramic connector, 95°C fire-resistant cable and thermal fuse
- ABS UV fire-resistant enclosure and stainless metal bracket in grey
- Quick installation by supplied stainless mounting bracket





Technical specifications

Model	AP-750EN
Description	EN54-24 Music Horn Speaker
Power output	12.5W-25W-50W & 8Ω
Line Output	100V or 70V & 8Ω
Frequency Response	90-20KHz
SPL(@1W/m)	99dB
IP Rate	IP66
Connector	By screw terminal with waterproof cover
Dimensions	315×360×255mm
Material	ABS UV fire-resistant enclosure and stainless metal bracket in grey
Mounting way	Quick installation by supplied stainless mounting bracket
Weight	4kg



Technical reference: MHS-60EN

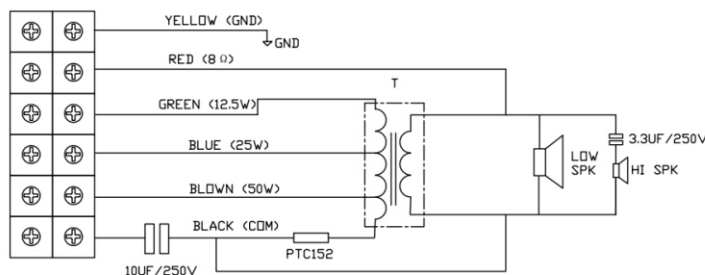

EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS
UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

www.udeaudio.com

rev.1 | 610.583A | 1 / 1

AP-750EN

Altavoz para exteriores 50W




EN54-24

- Altavoz de bocina para exteriores con transformador L100V/70V
- Cumple con la normativa EN54-24
- Adecuado para aplicaciones de megafonía en escuelas, parques, aeropuertos, etc.
- Transmisión del sonido a largas distancias
- Selección de potencias 12,5W-25W-50W y 8Ω
- Nivel de impermeabilidad IP66 con prensaestopas AB
- Conector cerámico, cable resistente al fuego y fusible térmico
- Instalación rápida mediante escuadra de acero





Características técnicas

Modelo	AP-750EN
Descripción	Altavoz exponencial para exteriores EN54-24
Salida de potencias	12.5W-25W-50W & 8Ω
Salida de línea	100V, 70V & 8Ω
Respuesta de frecuencia	90-20KHz
SPL(@1W/m)	99dB
Protección IP	IP66
Conector	Mediante terminal con tapa protectora impermeable.
Dimensiones	315×360×255mm
Material	Carcasa ABS resistente y soporte de acero inoxidable
Modo de montaje	Rápida instalación mediante escuadra de fijación
Peso	4kg



Referencia técnica: MHS-60EN

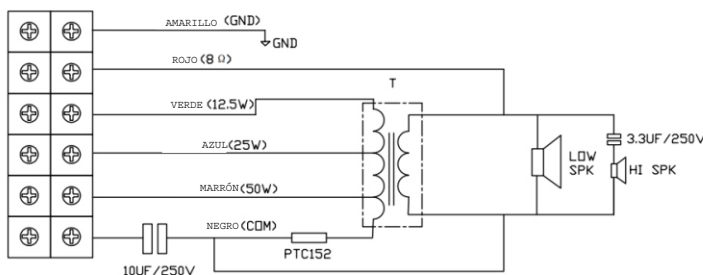

EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS
UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

www.udeaudio.com

rev.1 | 610.583C | 1 / 1