

MX-501

5 zones paging desk





MX-501 paging desk, associated with the MX-500 system, allows the emission of messages to a zone independently or to all zones. Signal and zone status indicators.

- ✓ Dedicated push button for broadcasting messages to all zones.
- ✓ AUX signal input and RJ45 connection on rear panel.
- ✓ Independent adjustment of AUX / MIC / CHIME input signal.
- ✓ 24VDC power supply.



Technical characteristics

Microphone	Condenser microphone
Polar Pattern	Cardioid
Connectors	RJ45, 24VDC input, 3.5mm stereo RCA
Frequency Response	-3dB 150Hz-22kHz
Input Level MIC	-46dBV
Input Level AUX	-10dBV
Output Impedance	Balanced 600 Ohms
Input Impedance	MIC 600 Ohms, AUX: 50k Ohms
Output Level	10dBV
S/N Ratio	-60dB
Interface	RS-485
Dimensions	460mm×140mm×115mm
Weight	670g

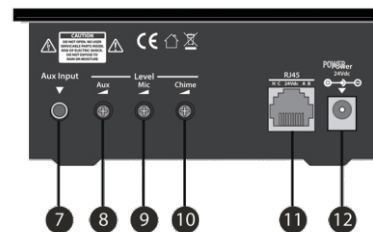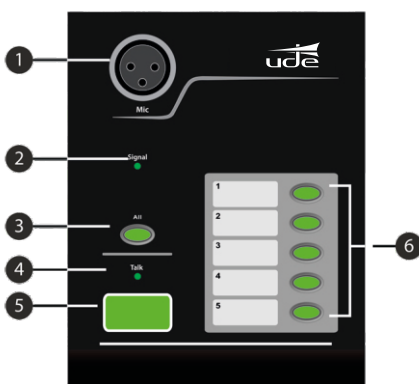

- | | | | |
|-------------------------|--------------------------|---------------------------------|-------------------------------------|
| 1. Microphone connector | 4. "Speak" LED indicator | 7. AUX Input | 10. Chime volume adjustment |
| 2. LED signal indicator | 5. "Speak" Push button | 8. AUX input volume adjustment | 11. RJ45 connector to MX-500 matrix |
| 3. "All zones" button | 6. Zone selection | 9. Microphone volume adjustment | 12. 24V DC input |



EQUIPOS Y SISTEMAS MEGAFONÍA/INTERCOM • PUBLIC ADDRESS SYSTEMS

UNIÓN DESARROLLOS ELECTRÓNICOS

Tel.: +34 934 772 854 / +34 609 914 787 • ude@udeaudio.com • BARCELONA - SPAIN

www.udeaudio.com

rev.0 | 610689a | 1 / 1