




Main characteristics

- ✓ Balanced audio output via RJ-45
- ✓ Audio signal level indicator
- ✓ Zone selection and management of audio sources and volume
- ✓ Connection to MX-1800 with UTP Cat 6 cable (max. 400 metres)
- ✓ 24V DC power supply
- ✓ MP3 player with independent volume control
- ✓ Line input with volume control
- ✓ MIC input with independent volume control

Technical characteristics

Model	MX-1888
Power supply	24V DC
MIC input sensitivity	10 ±2mV
LINE input sensitivity	300 ±50mV
USB input sensitivity	-10dB
MIC Frequency response	100Hz~15kHz (±3dB)
AUX Frequency Response	20Hz~20kHz (±3dB)
Noise	<0.5mV
Distortion	<0.5% 1KHz
RJ-45 port output level	2000±100mV
Dimensions	145mm×80mm×47mm
Weight	0.4Kg

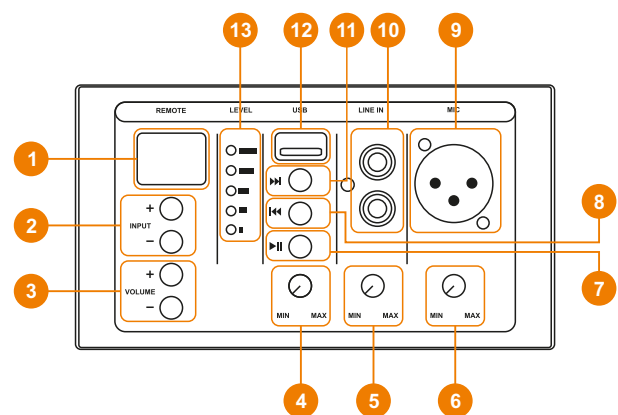

- | | | | |
|--------------------------|--------------------|--------------|---------------------------|
| 1 Display | 5 Volumen +/- LINE | 9 MIC Input | 13 Signal level indicator |
| 2 Audio source selection | 6 Volumen +/- MIC | 10 AUX Input | |
| 3 Volumen +/- | 7 Play / Pause | 11 Next song | |
| 4 Volumen +/- MP3 | 8 Previous song | 12 USB Input | |